

Cable glands free for customer:

W25: Profinet, Max cable diameter 17 mm

W20: Signals to crane, max cable diameter 13 mm


W20: Profibus In, max cable diameter 17 mm

W20: spare

W20: Profibus Out, max cable diameter 13 mm

W20: Supply voltage, max cable diameter 13 mm



Left hand side sensors on brake

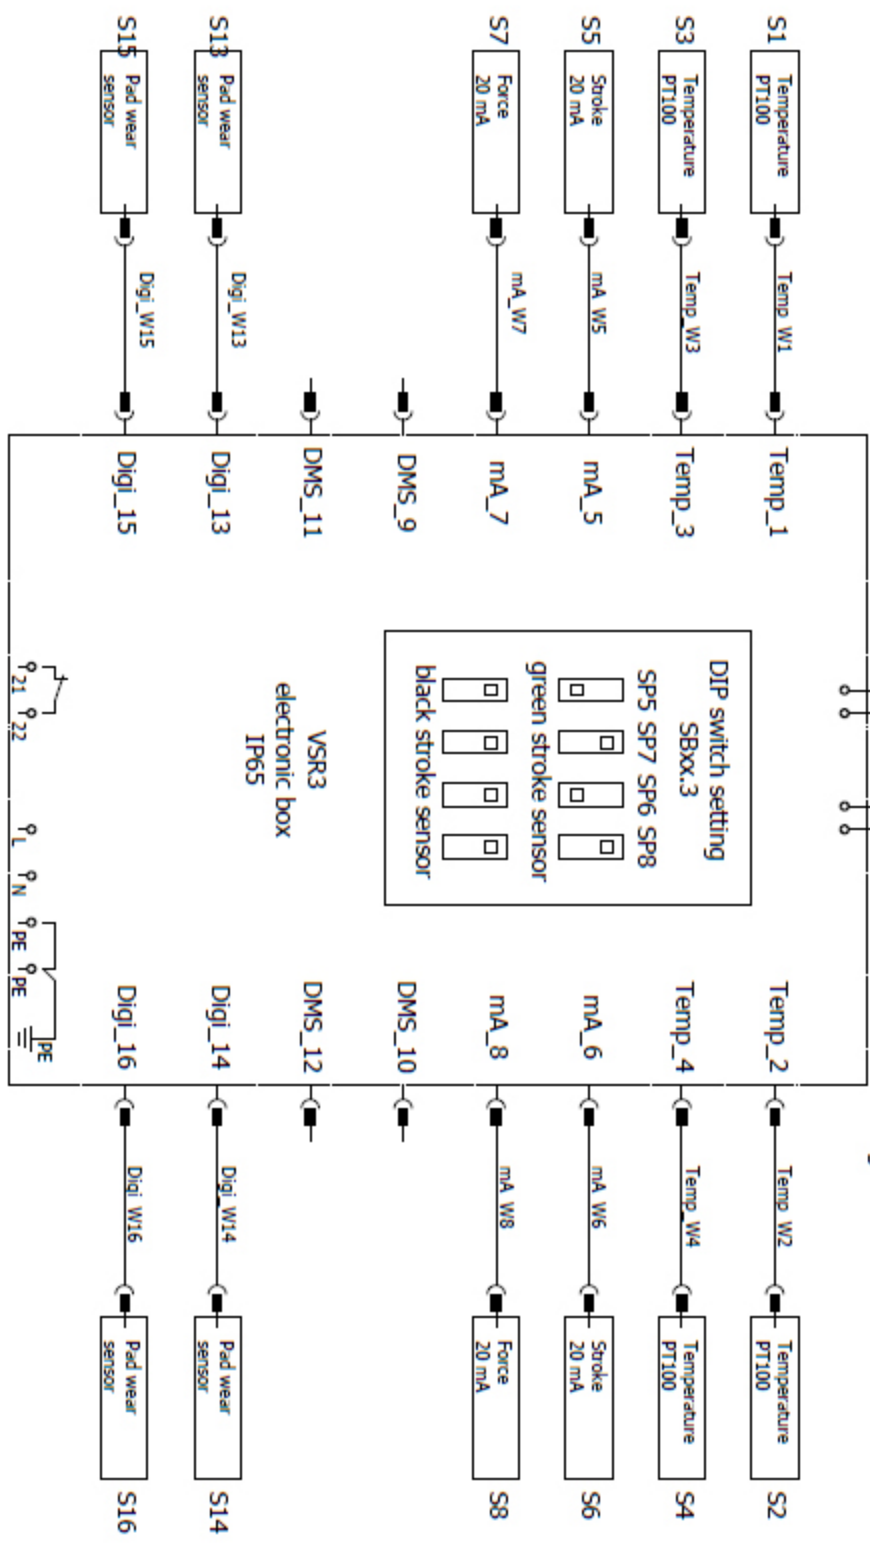

Right hand side sensors on brake

dIy
contact
1 A max.
NC

Supply
voltage
110-240 V AC
+/- 10%
50/60 Hz
P = 15VA

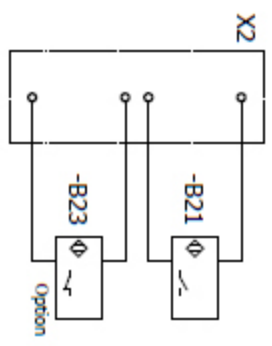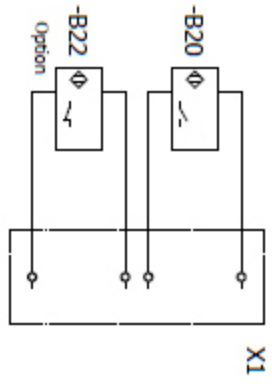

W1...W16 cable type:
PUR shielded 4x0,34 sqmm

X1...X16 plug type:
M12 - 4 pole female
A-coded

B20,B22: Proximity switch NO release control
B21,B23: Proximity switch NC manual released
X1,X2: Terminal box mounted on brake spring tube